


Standard arrangement

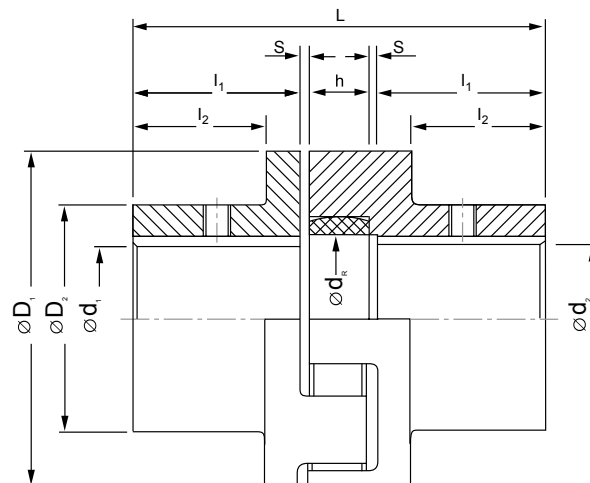

Size	Nominal torque	Max torque	Max speed	Min bore	Max bore	Dimensions								Total weight	Moment of inertia
						D ₁	D ₂	d ₃	l ₁	l ₂	L	s	h		
Series TMS	T _{nom} 80 sh 93 sh Nm	T _{max} 80 sh 93 sh Nm	n _{max} rpm	d ₁ /d ₂ min mm	d ₁ /d ₂ max mm	D ₁ mm	D ₂ mm	d ₃ mm	l ₁ mm	l ₂ mm	L mm	s mm	h mm	kg	J ₁ /J ₂ kg*m ²
50	- 15	- 40	15 000	9/9	25/25	50	42	19	29.5	23.5	75	2.0 + 1.5	12	0.7	0.0001 0.0001
70	- 55	- 160	11 000	10/10	38/38	70	55	26	38.5	31.5	100	2.5 + 1.5	18	1.7	0.0005 0.0005
85	- 75	- 225	9 000	10/10	44/44	85	65	36	43.0	35.0	110	3.0 + 2.0	18	2.8	0.0009 0.0009
100	65 130	195 390	7 250	10/10	53/53	105	75	46	49.0	37.5	125	3.5 + 2.5	20	5.0	0.0022 0.0022
125	125 250	375 750	6 000	13/13	63/63	126	90	55	56.0	44.0	145	4.0 + 3.0	25	9.0	0.006 0.006
145	200 400	600 1 200	5 250	13/13	75/75	145	105	65	60.5	47.5	160	4.5 + 3.0	30	10.5	0.011 0.011
170	315 630	945 1 900	4 500	18/18	85/85	170	120	90	74.5	60.5	190	5.5 + 3.5	30	17.0	0.024 0.024
200	550 1 100	1 650 3 300	3 750	20/20	95/95	200	135	100	98.5	82.5	245	6.5 + 4.0	35	29.5	0.057 0.057
230	850 1 700	2 550 5 150	3 250	28/28	110/110	230	150	115	110.0	91.0	270	7.5 + 4.5	35	41.0	0.1 0.1
260	1 330 2 650	4 000 7 950	3 000	32/32	130/130	260	180	140	112.5	88.5	285	7.5 + 5.0	45	59.0	0.2 0.2
300	1 950 3 900	5 850 11 700	2 500	40/40	145/145	300	200	162	131.5	107.5	330	8.5 + 5.0	50	87.0	0.36 0.36
360	3 250 6 500	9 700 19 500	2 150	45/45	150/150	360	210	215	172.0	140.0	417	9.0 + 5.0	55	140.0	0.81 0.81
400	4 450 8 900	13 800 26 700	1 900	80/80	160/160	400	225	250	183.5	157.0	440	9.0 + 5.0	55	160.0	0.93 0.93