


Standard hub with brake drum

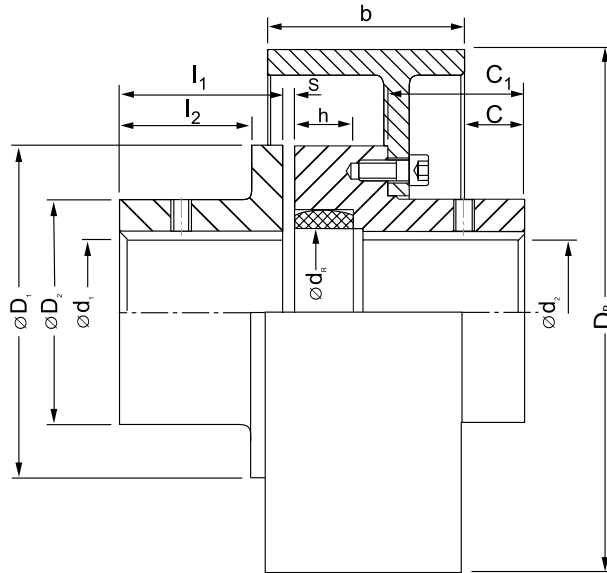

Size	Nominal torque	Max torque	Min bore	Max bore	Dimensions												Total weight	Moments of inertia	
					D_B	b	D_1	D_2	d_n	l_1	l_2	L	C	C_1	s	h			
Series TMS	T_{KN} 80 sh 93 sh Nm	T_{Kmax} 80 sh 93 sh Nm	d_1/d_2 min	d_1/d_2 max mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	J_1/J_2 Kg * m ²
100	65 130	195 390	10/10	53/53	200	75	105	75	46	49.0	37.5	125	14	39.5	3.5 + 2.5	20	10	0.0022/ 0.039	
125	125 250	375 750	13/13	63/63	200	75	126	90	55	56.0	44.0	145	20	45.5	4.0 + 3.0	25	14	0.006/ 0.041	
145	200 400	600 1 200	13/13	75/75	200	75	145	105	65	60.5	47.5	160	21	48.5	4.5 + 3.0	30	15	0.011/ 0.046/ 0.121	
					250	95									13	48.5		20	
170	315 630	945 1 900	18/18	85/85	250	95	170	120	90	74.5	60.5	190	27	62.0	5.5 + 3.5	30	26	0.024/ 0.132/ 0.367	
					315	118										13	62.0		35
200	550 1 100	1 650 3 300	20/20	95/95	315	118	200	135	100	98.5	82.5	245	38	84.0	6.5 + 4.0	35	47	0.057/ 0.391/ 1.093	
					400	150										26	84.0		63
230	850 1 700	2 550 5 150	28/28	110/110	400	150	230	150	115	110.0	91.0	270	36	93.0	7.5 + 4.5	35	74	0.1/ 1.114/ 3.043	
					500	190										25	93.0		100
260	1 330 2 650	4 000 7 950	32/32	130/130	500	190	260	180	140	112.5	88.5	285	25	91.0	7.5 + 5.0	45	118	0.2/ 3.124	
300	1 950 3 900	5 850 11 700	40/40	145/145	630	236	300	200	162	131.5	107.5	330	20	110.5	8.5 + 5.0	50	202	0.36/ 9.452/ 18.312	
					710	265										0	110.5		273
360	3 250 6 500	9 700 19 500	45/45	150/150	630	236	360	210	215	172.0	140.0	417	51	144.0	9.0 + 5.0	55	256	0.81/ 9.704/ 18.703	
					710	265										34	144.0		317
400	4 450 8 900	13 800 26 700	80/80	160/160	710	265	400	225	250	183.5	157.0	440	50	161.0	9.0 + 5.0	55	340	0.93/ 16.80	